

RCW plus

lime and fertilizer distributors, attached, to fertilize plants in row cultivation




RCW plus 5500



Adjustable wheels

RCW Plus Series spreaders are supplied with large and narrow wheels with wheel track adjustable in the range from 1800÷2250 mm (RCW plus 5500) and 2000÷2250 mm (RCW plus 8200). Such a solution allows precise adaptation of the wheel track in the machine to the tractor, which is ideal for row cultivation at fertilization of high plants.

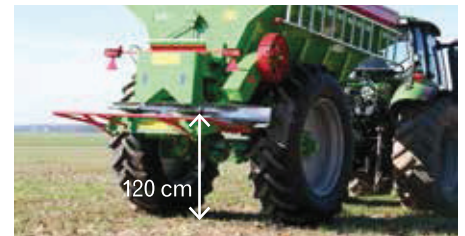

RCW plus 8200 M Distributors

are equipped with sowing discs located at the height of 120 cm from the ground level. This enables to fertilize plants in row cultivation. Fixed wheel distance of 1900 mm



Limiter for RCW plus

Limiter for limit spread provides the best precision when distributing fertilizer at a border of two fields of high plants in a simple manner.



Hydraulic belt drive

RCW Series spreaders have hydraulic conveyor speed control system. Electrohydraulic control of the floor conveyor allows precise distribution of the preset portion of fertilizer. As a standard, the distribution rate can also be controlled manually.

STANDARD EQUIPMENT

- » single-axis spreader
- » belt conveyor
- » hydraulic belt drive – RCW plus
- » conveyor drive from star wheel – RCW plus M
- » mechanical drive of spinner discs – RCW plus
- » hydraulic drive of spinner discs – RCW plus M
- » dual-function KP-03 controller
- » bottom or upper drawbars
- » handbrake
- » 2-line air brake system
- » drawbar support
- » lighting installation
- » external disc
- » spinner discs for fertilizer and lime made of stainless steel
- » PTO shaft

PRICE

RCW PLUS 5500

RCW PLUS 8200

RCW PLUS 8200 M

ACCESSORIES AT EXTRA CHARGE

Computer Superior multifunctional control system – maintaining of the preset dose of fertilizer or lime regardless of driving speed

hydraulically folded tilt for hopper

device for limit spread of granular fertilizers – mechanically foldable

device for limit spread of granular fertilizers – hydraulically foldable

ball hitch 80 mm dia

Type		RCW plus 5500	RCW plus 8200	RCW plus 8200 M
Hopper capacity [dm ³]		5 500	8 200	8 200
Conveyor drive		hydraulic		mechanical
Distance of the sowing discs from the ground [cm]		80		120
Operating width	lime [m]	8 ÷ 16		
	granular fertilizers [m]	10 ÷ 36		
Length × Width × Height [m]		5,70 × 2,29 × 2,45	5,70 × 2,55 × 2,72	5,70 × 2,55 × 2,95
Tyres		340 / 85 R48	20,8 R 42	20,8 R 42
Weight [kg]		2845	3100	3150
Power demand [HP]		60 ÷ 70	80 ÷ 90	80 ÷ 90

